



# RS-550/555SA

OUTPUT: APPROX 2.0~110W

Precious metal-brush motors


代表的用途: 气泵、按摩器

Air Pump Massager



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
RS-550SA-3780	6.0-18.0V	6V	3300	0.245	2780	1.28	167	4.8	1002	6.64
RS-550SA-5050	6.0-15.0V	7.2V	6330	0.44	5490	2.65	231	13.0	1606	15.9
RS-555SA-2595	18.0-30.0V	24V	6790	0.16	5670	0.88	257	14.9	1705	4.92

UNIT: MILLIMETERS

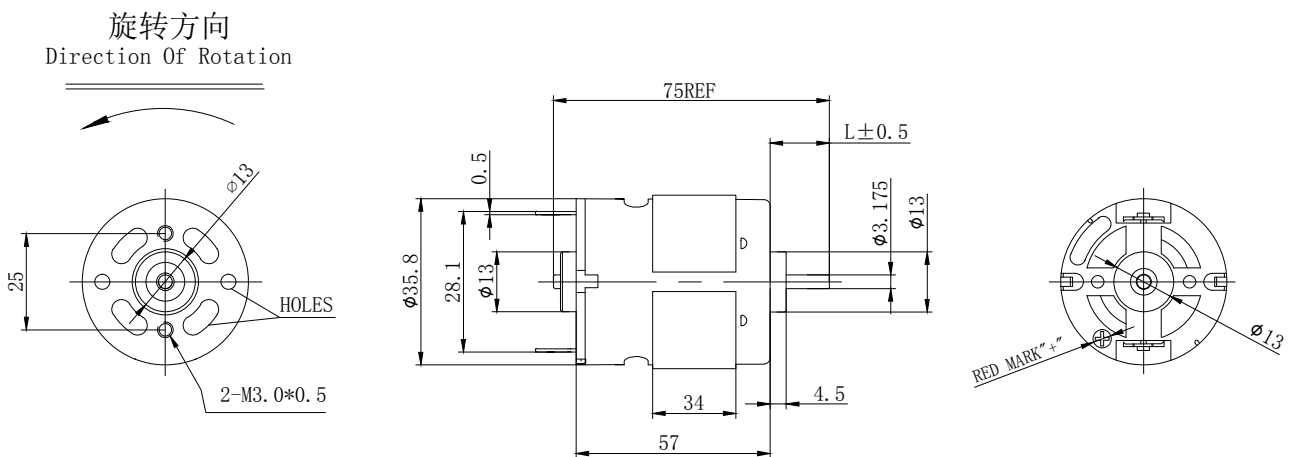

RS-550SA-5050

7.2V

RS-555SA-2595

24V

