



# RS-360/365SA

OUTPUT: APPROX 1.0~40W

Precious metal-brush motors


代表的用途: 精密机器  
家用电器

Typical Applications/Precision Instruments  
Household Appliances



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
RS-360SA-2885	3-9V	7.2V	12500	0.36	11000	1.3	50	5.64	420	8.60
RS-360SA-10500	12-25V	24V	7000	0.05	5600	0.20	46	2.64	230	0.80
RS-365SA-12190	6.8-36V	24V	10500	0.08	8400	0.33	51	4.39	260	1.32

UNIT: MILLIMETERS

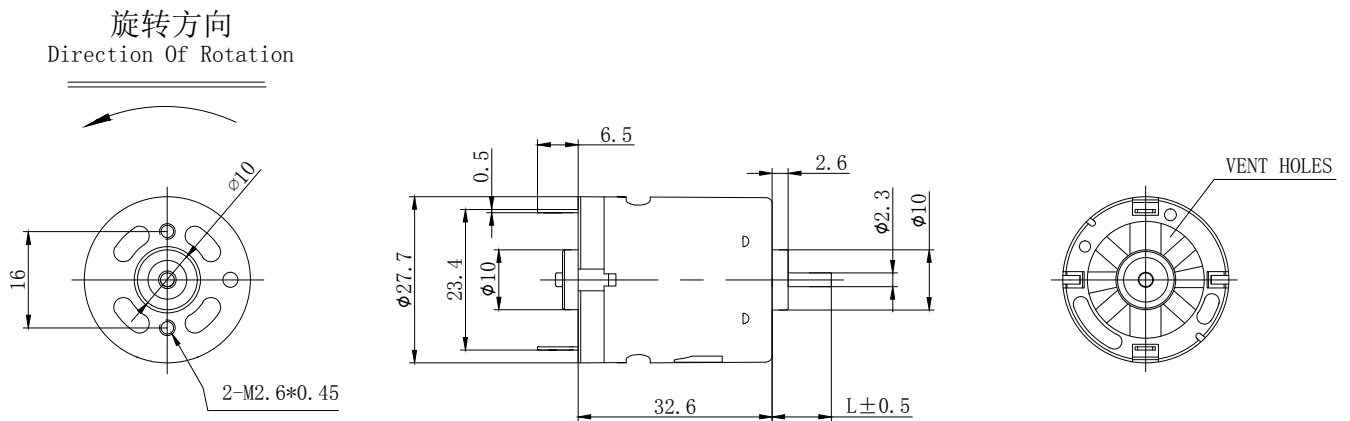

WEIGHT: 55g (APPROX)

RS-360SA-2885

7.2V

RS-365SA-12190

24V

